

SQ Medium-Heavy Range Premium Series

SODSAN
HEAVY INDUSTRIES

**Constant High
Productivity &
Reliability**



✓ Integrated Power Control

✓ Anti-Blank Hammering

✓ KEY BENEFITS

- High Power to Weight Ratio
- Premium Quality Materials
- Service&Maintenance Friendly
- Locking Device for the Tie Bolt Nut
- Enhanced Performance&Productivity
- Improved Vibration-Noise Damping
- Fully Enclosed Robust Housing& Dust Protector
- IF Design Award - Winner
- Reduced Noise Levels
- Slim Profile with Robust Structure



SQ Line Silenced Series

The latest design from Soosan is the SQ breaker. It is the result of more than 2 decades of experience since the company's inception in 1984. Through active communication and monitoring of a large group of valuable customers from around the world, we have gained working experience from quarry, mining and construction industries. The SQ series are practically an innovated hydraulic breaker while maintaining the superiority of the percussion mechanism and easy maintenance of the existing SB series.

The SQ-series have been designed with many special features :

The advanced gas & oil percussion mechanism generates extra power by accumulated gas pressure which ensures a very reliable performance with a wide range of excavator pump conditions.

IPC & ABH System, Integrated Power Control & Anti-Blank Hammering System allows you to choose from 3 different modes.

The automatic anti blank hammering function (shut off) can be switched off or on. The operator can select the correct operating mode from high frequency with normal power to low frequency with extra power. With this advanced system, the operator may choose the correct mode in accordance with site requirements in a matter of minutes and with a minimum of hassle.

Auto shut-off & easy start function

Breaker operation can be automatically stopped in order to prevent consequential damage to the power cell due to the blank hammering. Especially in secondary breaking or when the operator is unskilled.

Breaker operation is easy to restart when soft pressure is applied to the chisel to the work surface.


Enhanced vibration dampening & sound suppression system

Meet strict noise regulations and allow more comfort for the operator.

Further features are standard connections for underwater operation and an automatic lubrication pump.



IPC & ABH SYSTEM CONTROL

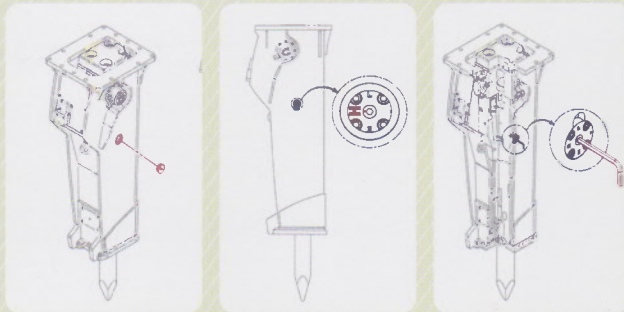

Selector Switch offers three operating modes and can be simply altered to each mode :

- **H – mode** : Long stroke with maximum power, ABH is off
- **L – mode** : Short stroke with maximum frequency, ABH is off
- **X – mode** : Long stroke with maximum power, ABH is on
(Blank hammering → Auto stop)
- **Easy start**

Power control & Anti blank hammering system

H – mode : Long stroke & Extra power, ABH is OFF




- Mode used for hard rock breaking such as primary breaking, trench works and foundation works where the rock condition is constant.
- Hammer can be started without applying contact pressure to the working tool.


L – mode : Short stroke & Maximum frequency, ABH is OFF

- Hammer can be started without applying contact pressure to the working tool.
- This mode is used for soft rock and semi-hard rock breaking.
- High impact frequency and normal power provides higher productivity and reduces strain on the hammer and the carrier


X – mode : Long Stroke & Extra power, ABH is ON

- This mode is used for hard rock breaking such as primary breaking, trench work, and secondary reduction works, where the rock condition is not constant.
- In ABH (Anti-blank hammering) working mode, it switches off the hammer automatically and prevents the blank hammering, as soon as the material is broken.
- The hammer can be easily restarted when minimal contact pressure is applied to the working tool.
- The ABH system reduces strain on the hammer and the carrier.

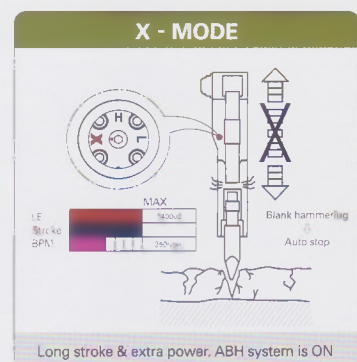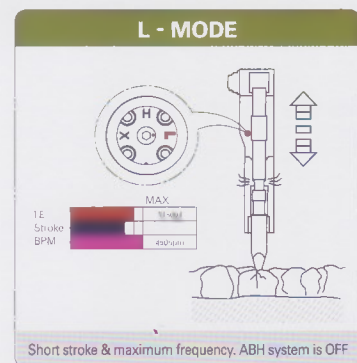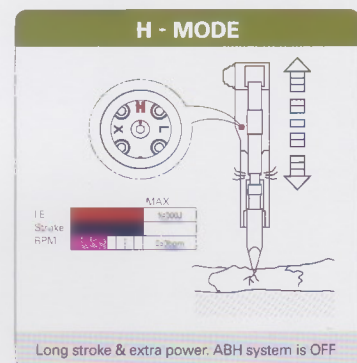


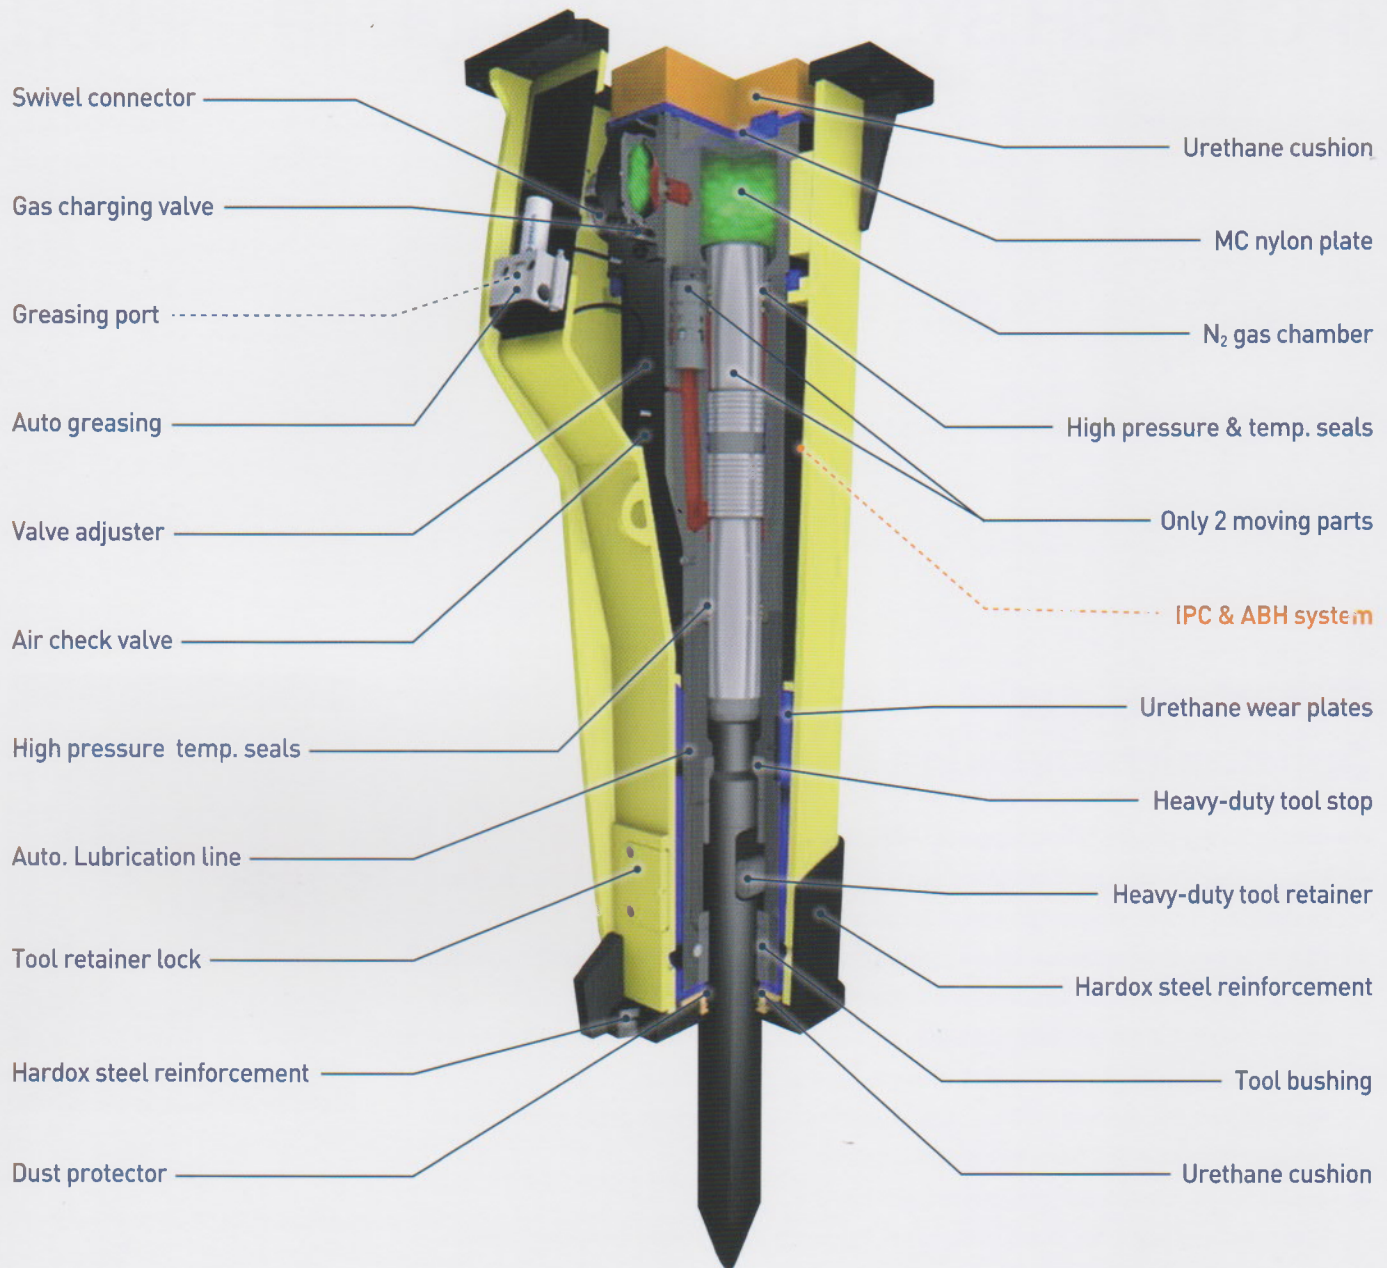

Dust protector reduces the noise level and dirt entry

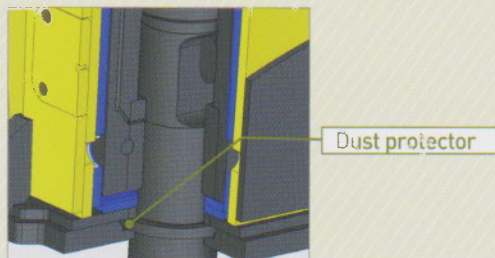

Improved tool retaining system.

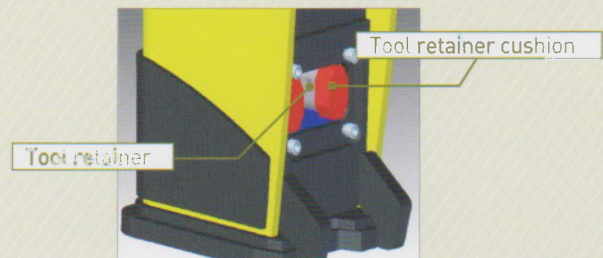

Advanced design technology for output energy

The well known powerful performance of the SB breakers is continued on the SQ line. With improvements to the percussion mechanism allows even more reliable and durable operation than the SB line.

Slim profile with robust structure

State of art slim profile for better visibility in narrow trench work. Hardox steel reinforcements at the lower end of the housing, protect the casing and power cell.

Improved vibration damping system

Fully isolated power cell with premium quality urethane cushions and wear plates absorbs shock and vibration resulting in reduced wear.

Fully enclosed housing and dust protector

For quieter operation and reduced dirt contamination.

Enhanced performance & productivity

By using a valve adjuster and an advanced power control system, SQ breakers can be adjusted to the excavator's specifications and jobsite conditions to enable maximum productivity.

Service and maintenance friendly


The greasing port is located on the service panel. The service panel gives direct and easy access to key components without removing the power cell from the housing.

Locking device for the tie bolt nut

This prevents the power cell from consequential damage that may be caused by the loosening of the tie bolt.

High power to weight ratio

The use of high quality materials and high technology results in less weight, and higher performance.

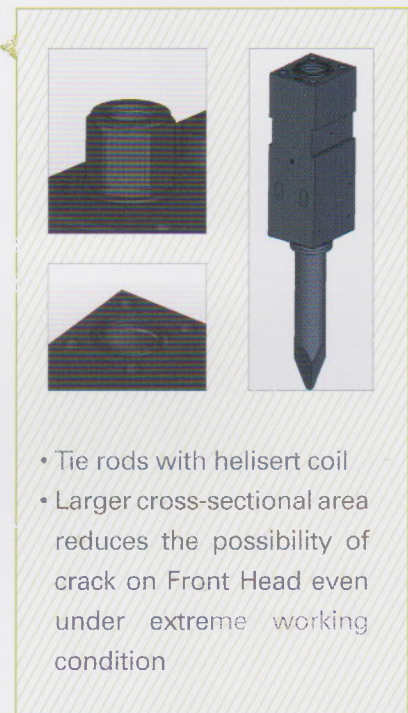

Improved vibration damping system




MC nylon plate : protecting Upper Cushion from heat.



Impact Power Mechanism 3D Analysis


Keeping dynamical stability through optimum design using 3D Software and computer System structural analysis
35 years of accumulated experiences and market feedback were implemented in the design.

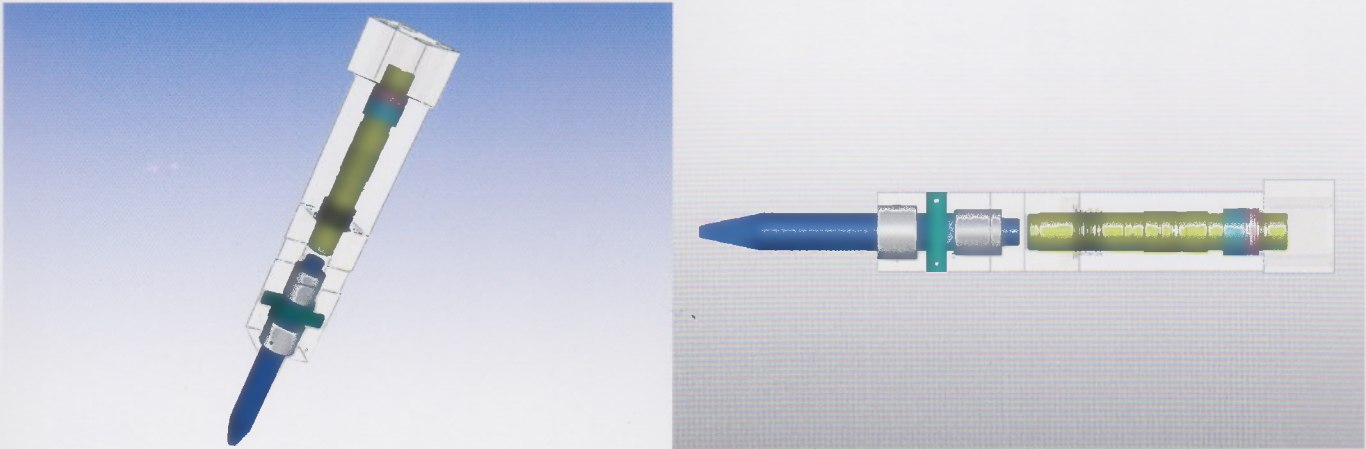


Unique Patent Technology

Piston scratch prevention device(Copper alloy retainer)


Minimized scratch to protect piston&cylinder

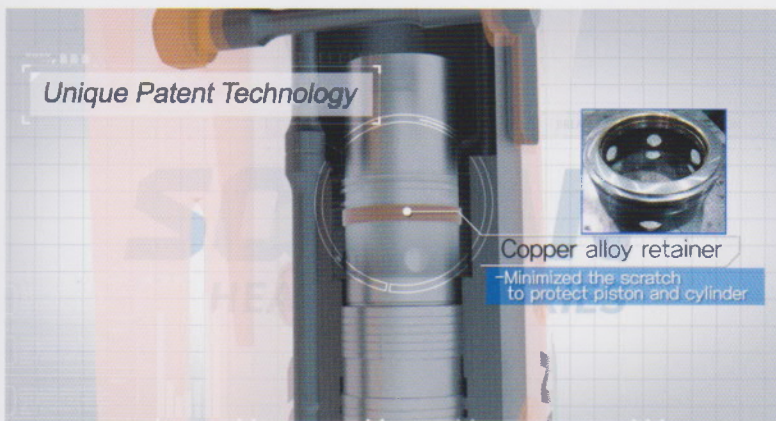

Helisert Coil for Through Bolt

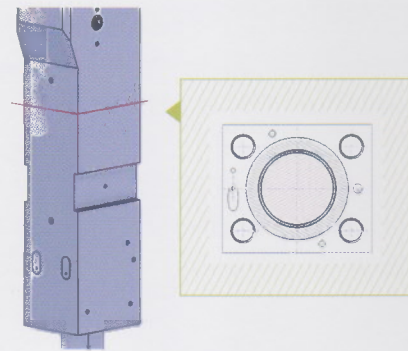


Through Bolt Loosening Prevention Device

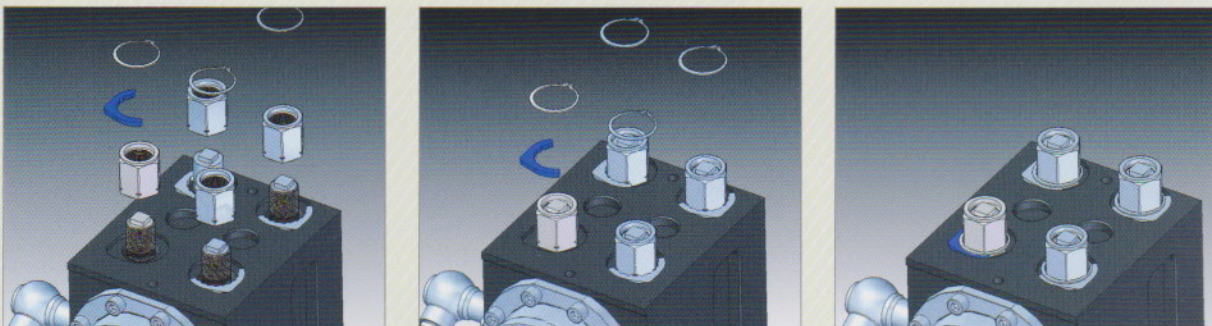

Applications ;

- Primary and secondary breaking in quarries
- Site preparation, foundation works
- Road construction
- Demolition works, heavily reinforced concrete
- Trenching
- Tunneling
- Bench leveling
- General construction works

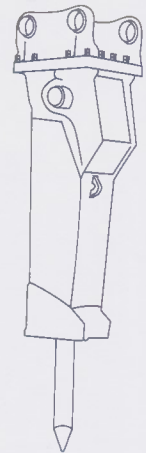

Specifications

Description		Unit	SQ60	SQ70	SQ80	SQ100	SQ120
Operating weight		kg (lbs)	1,607 (3,543)	1,759 (3,878)	2,053 (4,526)	2,185 (4,817)	2,671 (5,889)
Carrier weight		ton (lbs)	15~18 (33,000~40,000)	16~21 (40,000~46,000)	18~26 (40,000~58,000)	25~30 (55,000~66,000)	28~35 (62,000~77,000)
Height		mm (inch)	2,561 (101)	2,656 (105)	2,806 (110)	2,924 (115)	3,168 (125)
Required oil flow		l / min (g / min)	90~120 (23.3~31.7)	100~150 (26.4~39.6)	120~180 (31.7~47.6)	150~210 (39.6~55.5)	180~240 (47.6~63.4)
Operating pressure		bar (psi)	160~180 (2,276~2,560)	160~180 (2,276~2,560)	160~180 (2,276~2,560)	160~180 (2,276~2,560)	160~180 (2,276~2,560)
Impact rate	H-mode X-mode	bpm	350~650	350~600	350~500	300~450	300~450
	L-mode		600~850	500~850	500~700	430~580	430~580
Tool diameter		mm (inch)	125 (4.9)	135 (5.3)	140 (5.5)	150 (5.9)	155 (6.1)

Description		Unit	SQ130	SQ140	SQ150	SQ181
Operating weight		kg (lbs)	3,033 (6,687)	3,169 (6,986)	3,950 (8,708)	5,889 (12,983)
Carrier weight		ton (lbs)	30~45 (66,000~100,000)	30~45 (71,000~110,000)	40~55 (88,000~121,000)	50~90 (110,000~200,000)
Height		mm (inch)	3,360 (132)	3,441 (135)	3,577 (141)	4,112 (162)
Required oil flow		l / min (g / min)	200~260 (52.8~68.7)	200~260 (50.8~68.7)	210~290 (55.5~76.6)	350~450 (93~119)
Operating pressure		bar (psi)	160~180 (2,276~2,560)	160~180 (2,276~2,560)	160~180 (2,276~2,560)	180~200 (2,560~2,845)
Impact rate	H-mode X-mode	bpm	250~400	200~350	200~350	200~300
	L-mode		380~550	300~500	320~470	300~400
Tool diameter		mm (inch)	165 (6.5)	165 (6.5)	175 (6.9)	200 (7.9)

SOOSAN Global Network



Head office / Hwaseong Factory

260, Jeongmunsongsan-Ro, Yanggam-Myeon, Hwaseong-Si, Gyeonggi-Do, Korea
TEL +82-31-350-5273 FAX +82-31-350-5259 EMAIL info2@soosan.co.kr

SOOSAN China

Soosan Machinery (Qingdao) Co., Ltd.

North of Keyun-Road, East of Zhengyuan-Road, Qingdao National High-Tech Industrial Development Zone, Qingdao, Shandong Province, China
TEL +86-532-8796-5655 FAX +86-532-6868-2362 EMAIL saomai@soosan.co.kr

SOOSAN Europe

Ohmweg 18, 3208 KE, Spijkenisse, Netherlands
TEL +31-181-64-7194 FAX +31-181-64-1038 EMAIL dhlee65@soosan.co.kr

SOOSAN Middle East

P.O. BOX : 262280, LOB14-313 Jebel Ali Free Zone, Dubai, UAE
TEL +971-4-881-0502 FAX +971-4-881-0503 EMAIL kimht@soosan.co.kr

SOOSAN USA Inc.

1261 Wiley Rd Unit B Schaumburg, IL 60173
TEL +847 744 5982 FAX +847 890 6278 EMAIL keesj@soosan.co.kr
<http://www.soosanmachinery.com/>

Distributed by



SOOSAN

www.soosanheavy.com

Printed in Korea