


/ BROKK 70

The Brokk 70 is the perfect solution for safe and efficient demolition in confined spaces. Compared to its predecessor, the Brokk 60, the Brokk 70 has a stunning 100% more demolition capacity. Its combination of power, small size, and light weight allow for work in places where mechanized demolition has previously been impossible. Equipped with SmartPower™ and a smooth hydraulic system, the Brokk 70 features enormous power in a miniature size. With the Brokk 70, there is no need to continue using harmful hand tools.

- Weighs less than 560 kg
- 9.8 kW Brokk SmartPower™ electrical system
- Powered with only 16 A electricity fuse
- Extremely compact - gets through the narrowest doorways

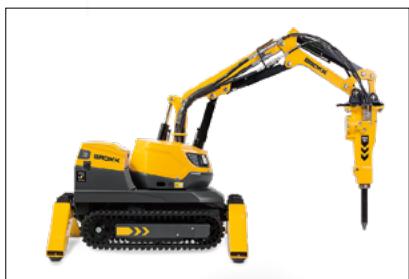

Hydraulic breaker in images: BHB 105. Drum cutter in image: BDC 40.
Load and stability diagram available on request



SMARTPOWER™

TECHNICAL DATA




Slewing speed	6,5 sec/245°
Transport speed, max.	2.7 km/h; 1.7 mph
Climbing inclination, max.	30°
Hydraulic system capacity	27 l; 7.1 US gal
Pump type	Variable load-sensing
System pressure	17 MPa; 2466 psi
Pump flow 50Hz och 60Hz	27 l/min; 7 US gal/min
Power technology	SmartPower™
Electric motor type	ABB
Power*	9.8 kW
Recommended fuse size*	16 A
Starting device	Direct start
Control type	SmartRemote™, portable
Signal code	Digital
Transfer	Professional radio/Cable
Range, radio	Up to 300 m
Machine weight**	560 kg; 1235 lbs
Recommended attachment weight	105 kg; 231 lbs
Sound power level L_{WA}***	90 dB(A)

*Valid for 400 V/50 Hz and 440 V/60 Hz

**Excluding attachment and extra equipment

***Measured according to directive 2000/14/EC

SIZE

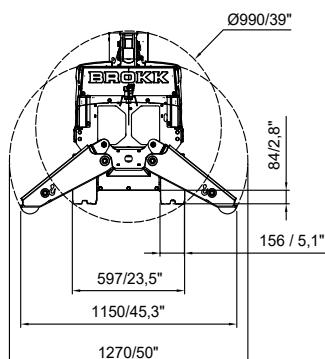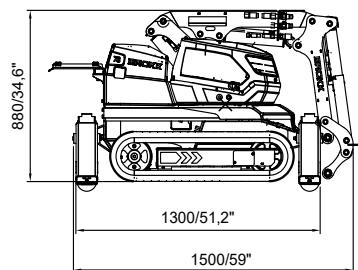

OPTIONS

Extra cylinder protection
Rubber caterpillar tracks
Forced draft cooling for machine
Forced draft cooling for breaker
Steel pads
Atomized water mist NEW!
Water spray for breaker
Extra hydraulic function
Lifting eyes (regular lifting points are standard)
Motion warning

RANGE

