

# / BROKK 110

The Brokk 110 can handle almost anything. With its compact size and outstanding power, it dominates in confined spaces and can easily handle tough terrain or stairs. Additionally, the Brokk 110 can fit in an elevator, as well as a car trailer or small truck. The Brokk 110 is the perfect solution for a wide variety of residential, commercial, and industrial environments. It is truly stronger, smarter, and tougher.

- The most powerful machine in its size
- 19.5 kW Brokk SmartPower™ electrical system
- Powered with both 16 A and 32 A
- 360° working radius



Hydraulic breaker in images: BHB 155. Concrete crusher in image: CC340.  
Load and stability diagram available on request



## TECHNICAL DATA



<b>Slewing speed</b>	10 sec/360°
<b>Transport speed, max.</b>	2.5 km/h; 1.6 mph
<b>Climbing inclination, max.</b>	30°
<b>Hydraulic system capacity</b>	40 l; 10.6 US gal
<b>Pump type</b>	Variable load-sensing
<b>System pressure</b>	18 MPa; 2611 psi
<b>Pump flow 50 Hz</b>	54 l/min; 14 US gal/min
<b>60 Hz</b>	65 l/min; 17 US gal/min
<b>Power technology</b>	SmartPower™
<b>Electric motor type</b>	ABB
<b>Power*</b>	19.5 kW
<b>Recommended fuse size*</b>	32 A
<b>Minimum fuse size (reduced power)*</b>	16 A
<b>Starting device</b>	Soft start/Direct start
<b>Control type</b>	SmartRemote™, portable
<b>Signal code</b>	Digital
<b>Transfer</b>	Professional radio/Cable
<b>Range, radio</b>	Up to 300 m
<b>Machine weight**</b>	990 kg; 2183 lbs
<b>Recommended attachment weight</b>	160 kg; 353 lbs
<b>Sound power level L<sub>WA</sub>***</b>	91 dB(A)

\*Valid for 400 V/50 Hz and 440 V/60 Hz

\*\*Excluding options and attachment

\*\*\*Measured according to directive 2000/14/EC, excl. attachment


## SIZE

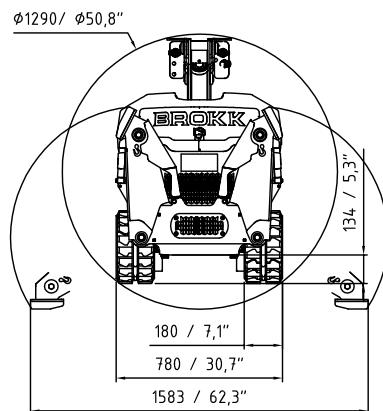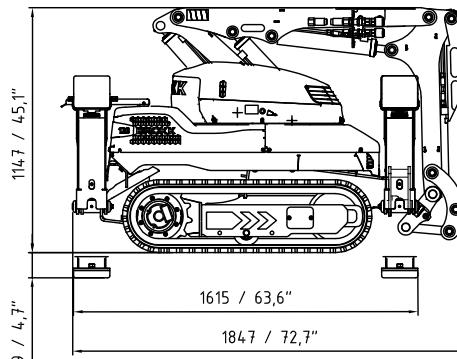

## OPTIONS

Extra cylinder protection
Rubber caterpillar tracks
Steel caterpillar tracks
Heat resistant hoses
Forced draft cooling for machine
Forced draft cooling for breaker
Steel pads
Atomized water mist <b>NEW!</b>
Air flushing for breaker
Water spray for breaker
Extra hydraulic function
Drainage hose
CAN cable connection
Counterweight
Lifting eyes (regular lifting points are standard)
Extra support roller for rubber caterpillar tracks
Motion warning

## RANGE

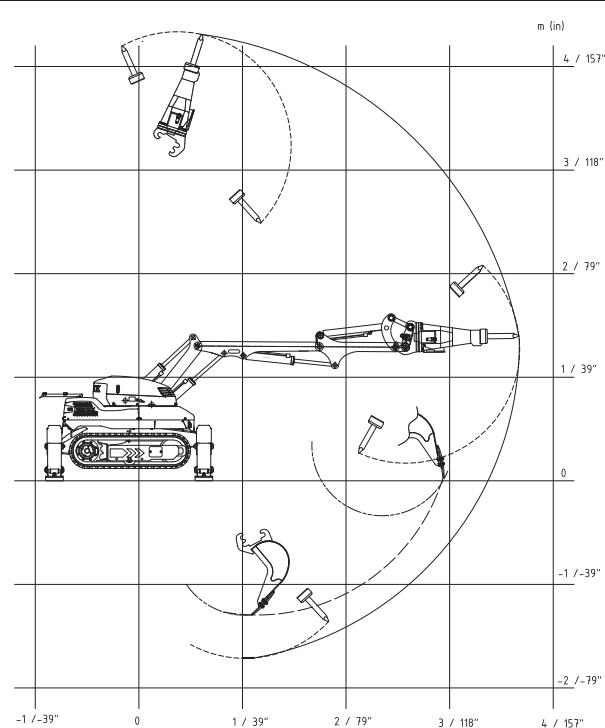

Tolerances for technical data may vary