
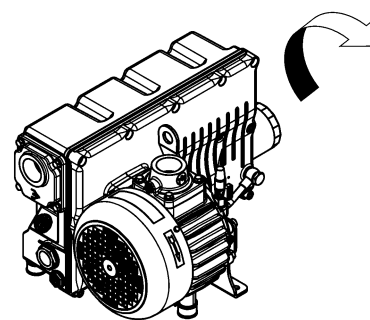
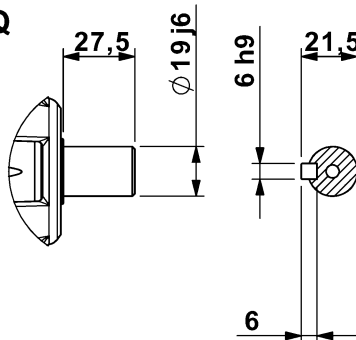
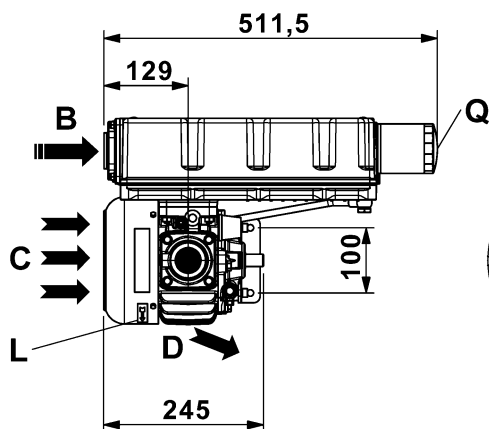
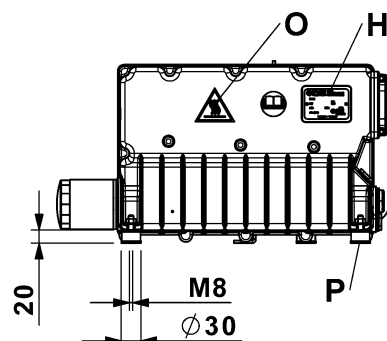
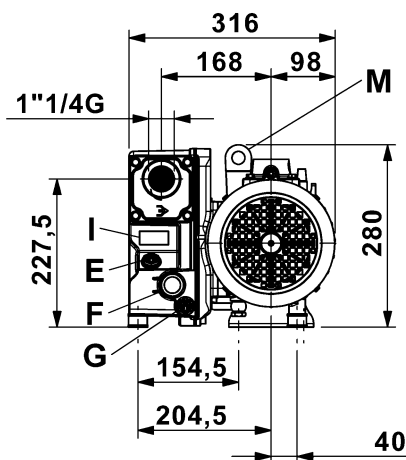


EU47SP – EU47SP HWT

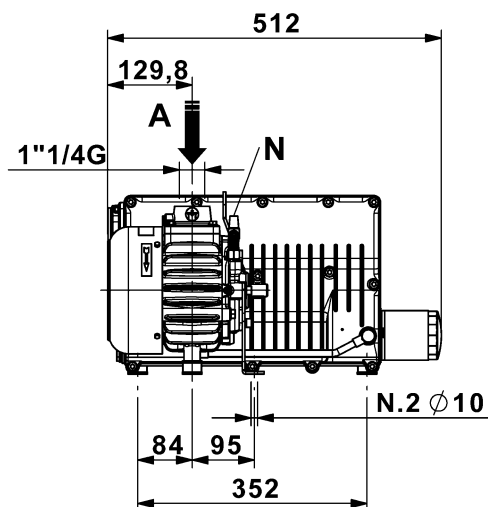

I

EN

F

D

E

A	Aspirazione	Inlet	Aspiration	Einlass	Aspiración
B	Scarico aria	Exhaust	Sortie de l'air	Luftauslass	Salida de aire
C	Entrata aria raffreddamento	Cooling air inlet	Entrée air refroidissement	Kühlluftseintritt	Entrada aire refrigeración
D	Uscita aria raffreddamento	Cooling air outlet	Sortie air refroidissement	Kühlluftaustritt	Salida aire refrigeración
E	Tappo carico olio	Oil filling plug	Bouchon remplissage huile	Öleinfüllschraube	Tapón carga de aceite
F	Spia livello olio	Oil level sight glass	Voyant niveau huile	Ölschauglas	Mirilla aceite
G	Tappo scarico olio	Oil drain plug	Bouchon vidange huile	Ölablass-Schraube	Tapón vaciado de aceite
H	Targhetta identificazione	Pump name plate	Plaquette d'identification	Maschinenschild	Placa de identificación
I	Targhetta oli	Oil grade label	Plaquette huiles	Ölempfehlungsschild	Placa tipos de aceites
L	Targhetta rotazione	Rotation plate	Plaquette rotation	Drehungsschild	Placa sentido de giro
M	Golfaro di sollevamento	Lifting eyebolt	Anneau de levage	Aufhebenöschraube	Gancho de levantamiento
N	Zavorratore	Gas ballast valve	Lest d'air	Gasballastventil	Valvula gas-ballast
O	Targhetta superfici calde	Hot surfaces name plate	Plaquette surfaces chaudes	Typenschild für warme Fläche	Placa superficies calientes
P	Antivibranti	Vibration damper	Pied antivibratoire	Schwingungsdämpfer	Antivibrante
Q	Filtro olio	Oil filter	Filtre huile	Ölfilter	Filtro de aceite



**SCHEDA TECNICA
DATA SHEET
FICHE TECHNIQUE
TECHNISCHE KARTE
ESQUEMA TECNICO**

**EU47SP
EU47SP HWT**

Pag.: 1/2



Data: 07/22

ST6228.PP0

		EU47SP		EU47SP HWT
Portata nominale* Nominal speed* Débit nominal* Nennsaugvermögen* Caudal nominal*	m ³ /h	50Hz	50	
		60Hz	56	
Pressione limite totale con zavorratore chiuso* (OFF) Ultimate total pressure with gas ballast valve closed* (OFF) Vide final total avec lest d'air fermé* (OFF) Grenzdruck bei geschlossenem Gasballastventil* (OFF) Presión final total con valvula gas-ballast cerrada* (OFF)	mbar	≤ 0,1		-
	Pascal	≤ 10		-
Pressione limite totale con zavorratore aperto* (ON) Ultimate total pressure with gas ballast valve open* (ON) Vide final total avec lest d'air ouvert* (ON) Grenzdruck bei offenem Gasballastventil* (ON) Presión final total con valvula gas-ballast abierta* (ON)	mbar	≤ 0,3		≤ 0,8
	Pascal	≤ 30		≤ 80
Numero di giri Rotational speed Número de revoluciones Drehzahl Velocidad de giro	min ⁻¹	50Hz ~3	1500	
		60Hz ~3	1800	
Potenza richiesta # Needed power # Puissance demandée # Kraftbedarf # Potencia requerida #	kW	50Hz ~3	1,1	
		60Hz ~3	1,5	
Livello di pressione acustica Sound pressure level Niveau de pression acoustique Schalldruckpegel Nivel de presión acústica	dB(A) EN ISO 2151	50Hz	61	
		60Hz	62	
Pressione max vapore H ₂ O ammissibile Water vapour tolerance Pression de vapeur d'eau maximale admissible Wasserdampfverträglichkeit Presión máxima de vapor de agua admisible	mbar	30		80
Quantità vapore H ₂ O ammissibile Water vapour pumping capacity Capacité de pompage de la vapeur d'eau Wasserdampfkapazität Cantidad de vapor de agua admisible	kg/h	50Hz	1	2
		60Hz	1,2	2,4
Quantità d'olio Quantity of oil Quantité d'huile Ölmenge Cantidad de aceite	l	2		
Peso totale Total weight Poids total Gesamtgewicht Peso total	kg	27,2		

*Secondo accordi PNEUROP 6602.
*According to Pneuop standard 6602.
*Selon la norme Pneuop 6602
*Nach der Pneuop Norm 6602..
*Según la normativa Pneuop 6602.

#Valido per temperature fino a 40°C e altitudini inferiori a 1000 m.
#Valid for temperatures up to 40°C and altitudes lower than 1000 m.
#Valable pour températures jusqu'à 40°C et pour altitudes inférieures à 1000 m.
#Gültig für Temperaturen bis 40°C und für Höhen weniger als 1000 m.
#Válido para temperaturas hasta 40°C y altitudes inferiores a 1000 m.

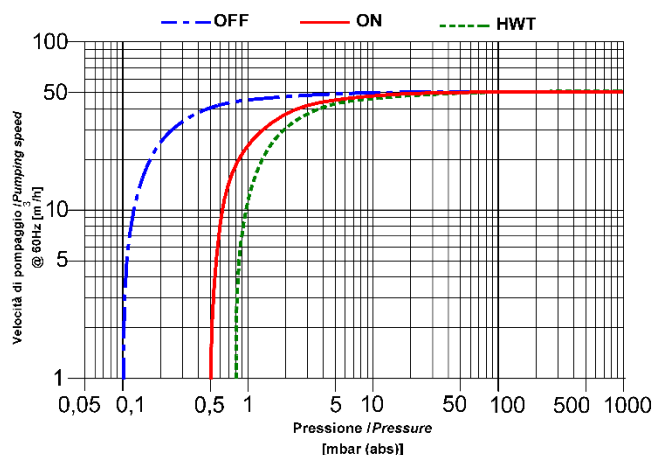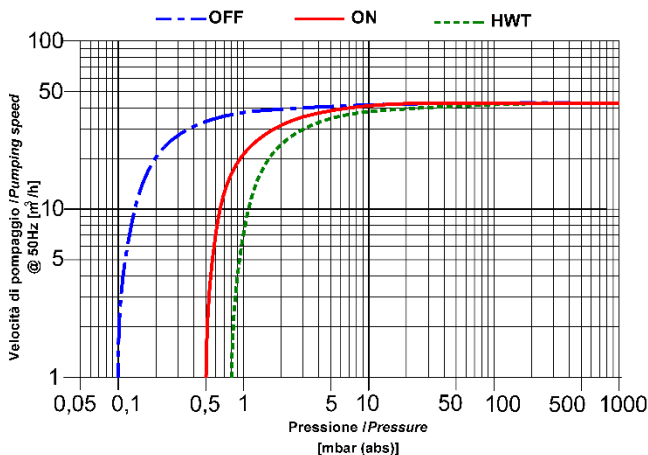

**SCHEDA TECNICA
DATA SHEET
FICHE TECHNIQUE
TECHNISCHE KARTE
ESQUEMA TECNICO**

**EU47SP
EU47SP HWT**

Pag.: 2/2

Data: 07/22

ST6228.PP0